

# SONANCE

## PS-P85T HIGH OUTPUT PENDANT SPEAKER

### PROFESSIONAL SERIES DATA SHEET

#### PROFESSIONAL SERIES HIGH OUTPUT LOUDSPEAKERS

The Professional Series High Output Loudspeakers deliver elevated SPL, controlled dispersion, and clear speech intelligibility in demanding commercial environments. Each model pairs an 8-inch low-frequency driver with a 1.4-inch coaxially mounted compression driver, enabling the series to handle foreground music and open microphone applications with extended low-frequency response down to 41 Hz — often eliminating the need for subwoofers and reducing system complexity.

#### APPLICATIONS

- Sports bars and high energy hospitality venues
- Nightclubs and upscale lounges
- Event venues and ballrooms
- Fitness studios and large commercial spaces
- High ceiling environments with challenging acoustics

The advanced Variable Dispersion technology allows installers to fine tune coverage patterns, targeting specific audience zones with precision, to address challenging acoustic spaces while maintaining consistent sound quality. Optional mounting accessories and finish options offer flexible installation and design matching



#### FEATURES AND BENEFITS

##### IMMERSIVE POWER

8" woofer with 1.4" coaxially mounted compression driver handles foreground music, open microphones, and high-dynamic-range applications, delivering unmatched clarity and coverage.

##### VARIABLE DISPERSION

Magnetically attached horn and collar assembly provides 120° or 80° coverage options, is field-adjustable without special tools, and includes a two-position switch that optimizes the crossover for each configuration.

##### INSTALLATION VERSATILITY

Available in Surface, Pendant, Blind Mount In-ceiling, and Two-piece In-ceiling Pre-install System — all with identical tonal character for seamless mix-and-match deployment.

#### INCLUDED ACCESSORIES

- Round Grille
- Screw-On Top Cover
- Euroblock Wire Connector
- Variable Dispersion Horn
- Collar Claw Removal Tool
- Water-Resistant Terminal Boot

#### HANGING KIT INCLUDES

- (2) Stainless Steel Cables with Snap Hooks
- (2) Gripple Hangers
- (1) Gripple Adjustment Tools
- (1) Hanging Instructions

#### OPTIONAL ACCESSORIES

- Replacement Round Grille White (PR) | 40268
- Replacement Round Grille Black (PR) | 40269
- Replacement Hanging Hardware Kit | 40176

# TECHNICAL SPECIFICATIONS

## PS-P85T HIGH OUTPUT PENDANT SPEAKER

SKU 40234 - Black - RAL 7021 | 40233 - White - RAL 9003

### TRANSDUCERS

LF Driver 8" (203mm) aluminum cone, Santoprene surround, 60.55mm Voice Coil Size, Ferrite Magnet

HF Driver 1.4" (36mm) aluminum dome compression driver, 36mm Voice Coil Size, 1" (25mm) Exit Size, Neodymium Magnet, 1500Hz Crossover Frequency

### PERFORMANCE SPECIFICATIONS

Frequency Range (-10dB) 36.6Hz - 25kHz  
Frequency Range (-3dB) 41.4Hz - 20kHz  
Nominal Sensitivity 88 dB SPL  
Long Term Power Handling (IEC) 150 watts (600 Watts Peak), 100 Hours  
Program Power 300 watts (1200 Watts Peak), 2 Hours  
Long Term - Maximum SPL 109dB (115dB Peak)  
Program Power - Maximum SPL 112dB (118dB Peak)  
Rated Impedance 8 ohms bypass

### ACOUSTIC SPECIFICATIONS

Coverage Pattern 1kHz to 10kHz 120° or 80° Axis Symmetric  
Collar Directivity Factor (Q) 5.7dB (Average 1kHz to 16kHz)  
Horn Directivity Factor (Q) 8.65dB (Average 1kHz to 16kHz)  
Collar Directivity Index (DI) 7.5dB (Average 1kHz to 16kHz)  
Horn Directivity Index (DI) 9dB (Average 1kHz to 16kHz)

### ELECTRICAL SPECIFICATIONS

Transformer Taps (70V) 120W, 60W, 30W, 15W (8 ohm bypass)  
Transformer Taps (100V) 120W, 60W, 30W (8 ohm bypass)  
Input Connector Four pin, Euroblock with loop output connections

### ENCLOSURE DETAILS

Enclosure Material Polypropylene plastic (UL94V-0)  
Baffle Material Polypropylene plastic (UL94V-0)  
Grille Material Steel  
Suspension Points Back  
Enclosure/Port Tuning 41.1Hz  
Standards Compliance UL 1480A, CSA-C22.2 No.205, NFPA70, and NFPA 90A

### PHYSICAL DIMENSIONS

Overall Dimension (Dia x D) 11.17" x 24.69" (283.8mm x 627mm)  
Round Trimless Grille (Dia) 11.17" (283.8mm)

### WEIGHT SPECIFICATIONS


Shipping Weight (Each) 30.21 lbs. (13.7kg)  
Net Weight w/ Grille 23.55 lbs. (10.68kg)

### ENVIRONMENTAL SPECIFICATIONS


Operating Temperature Range -40 F to 140 F (-39.96 C to 60 C)  
IP Rating N/A

# PS-P85T GRAPHS


COLLAR DIRECTIVITY

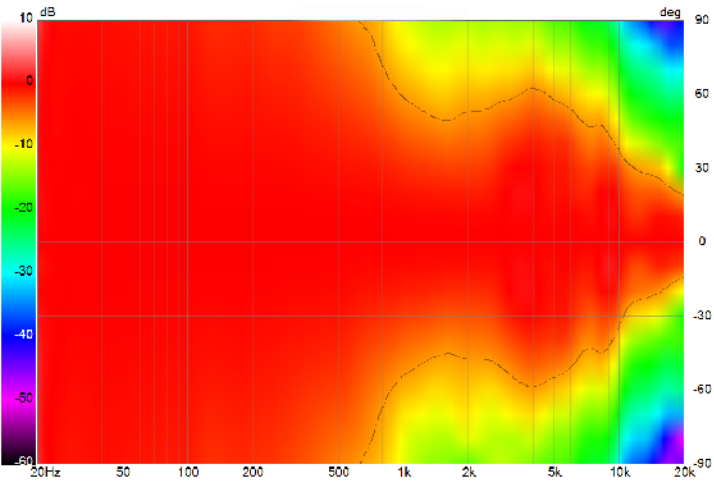

HORN DIRECTIVITY

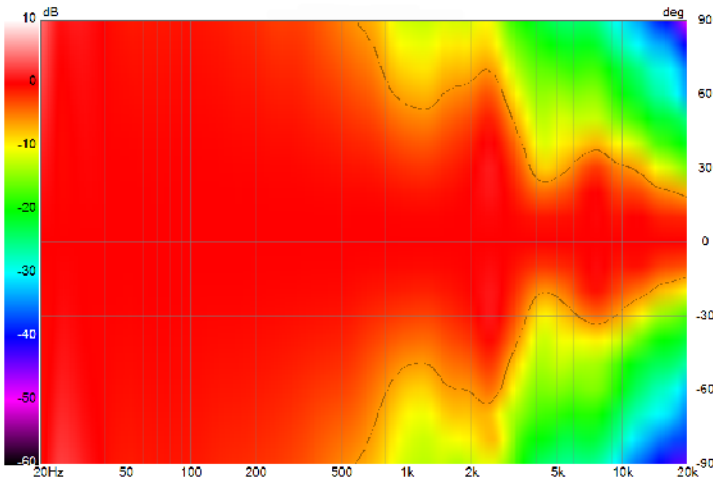


COLLAR IMPEDANCE

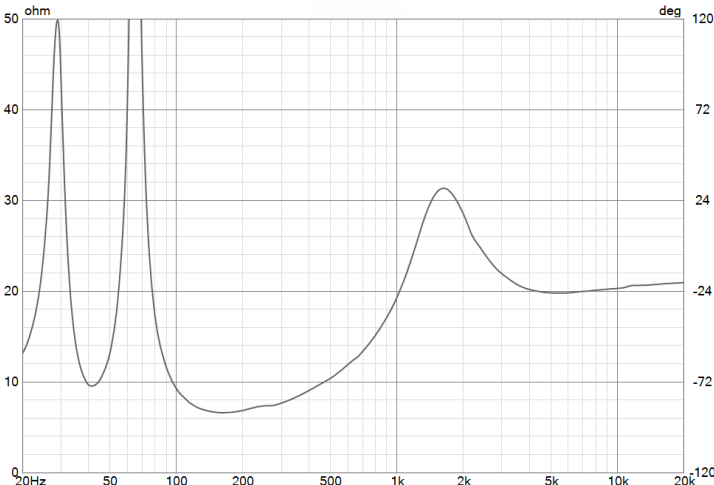


HORN IMPEDANCE

— Generator Load impedance

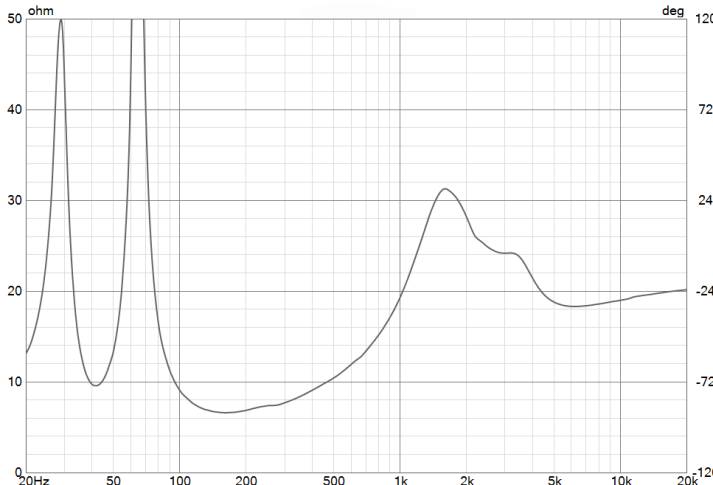


COLLAR SPL

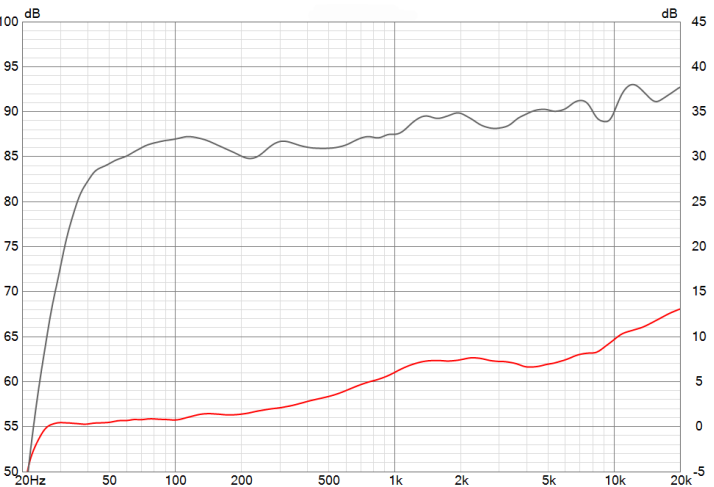

HORN SPL

— On-axis  
— Sound Power DI

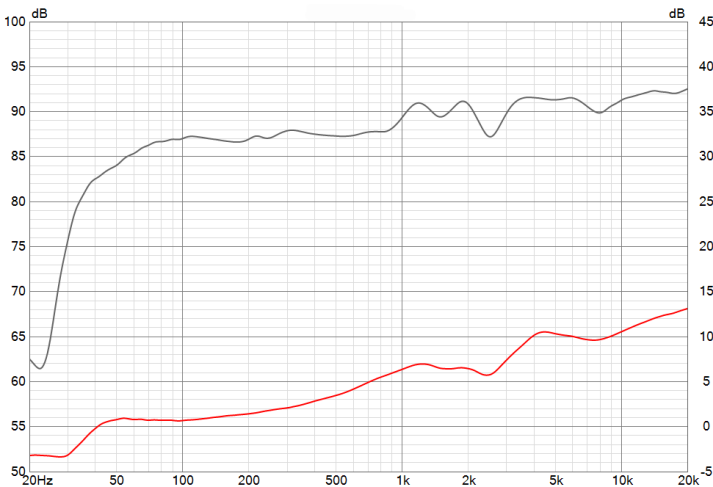


DIMENSIONAL SKETCHES SPECIFICATIONS


PS-P85T High Output Loudspeaker

Diameter: 11.17" (283.8mm)


Depth: 24.69" (627mm)

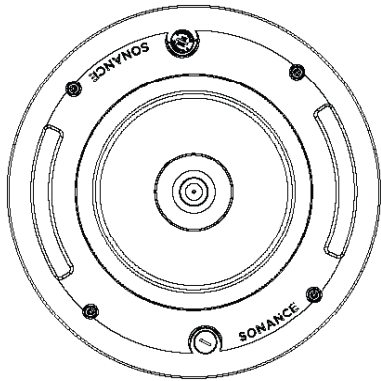



Loudspeaker Front  
11.17" (283.8mm)

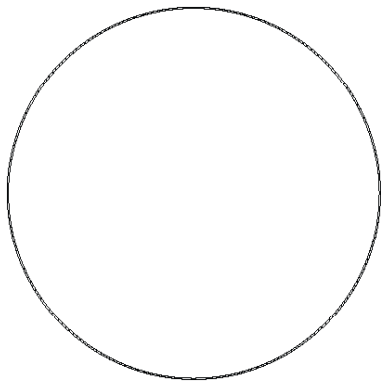

Grille Front  
11.17" (283.8mm)

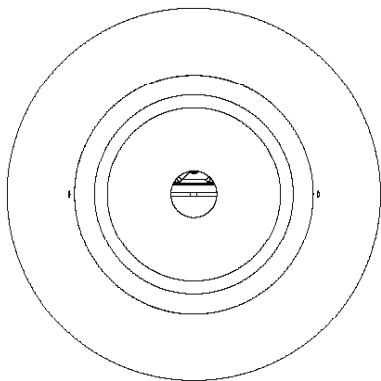

Loudspeaker Back

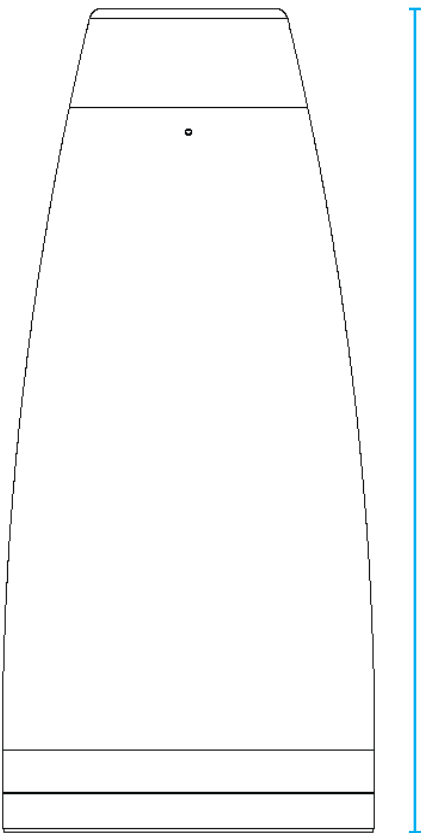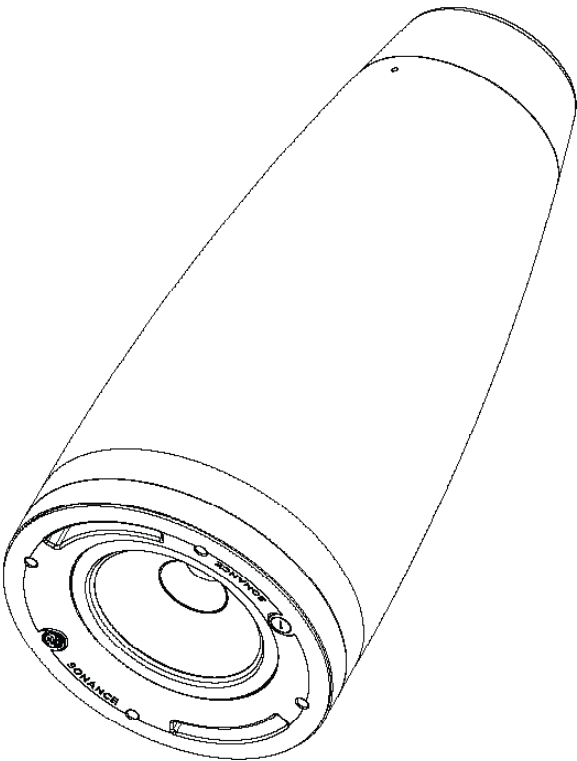

24.69" (627mm)

Loudspeaker Side

## ARCHITECTURAL SPECIFICATIONS

Sonance Professional Series - PS-P85T 70V/100V/8 ohm Selectable 8" Pendant Speaker

The loudspeaker shall be of the two-way type comprising a single pendant mount enclosure containing one 8" (203mm) aluminum cone, santoprene surround low frequency transducer with ferrite magnet and 60.55mm voice coil, and one 1.4" (36mm) coaxially mounted aluminum dome compression driver high frequency transducer with neodymium magnet, 36mm voice coil, and 1" (25mm) exit with 1500Hz crossover frequency. It shall feature interchangeable collar and horn directivity options for flexible coverage patterns. Frequency range shall be 41.4Hz – 20KHz (+/-3dB). Long term power handling shall be 150 Watts continuous (600 Watts Peak) for 100 hours per IEC standards, with program power of 300 Watts (1200 Watts Peak) for two hours. The unit shall be supplied with a laminated core line matching transformer suitable for 100 volt or 70 volt with control allowing user selectable power taps of 120W, 60W, 30W, and 15W (70V), 120W, 60W, and 30W (100V), and an 8 ohm bypass. The enclosure shall be constructed from polypropylene plastic (UL94V-O) with IPX4-rated water resistance suitable for indoor applications. The grille shall be constructed from steel. The speaker shall be suitable for commercial installation per UL1480A standards. Wire shall be terminated via four pin Euroblock connector with loop output connections. Suspension points shall be provided on the back enclosure to allow secure pendant mounting. The back enclosure cubic volume shall be .83 cubic feet (23.5 cubic liters) with port tuning at 41.1Hz. Coverage pattern from 1kHz to 10kHz shall be 120 degrees axis symmetric (collar configuration) or 80 degrees axis symmetric (horn configuration) with directivity factor (Q) of 5.7 (collar) or 8.65 (horn) averaged from 1kHz to 16kHz and directivity (DI) of 7.5dB (collar) or 9dB (horn) averaged from 1kHz to 16kHz. Operating temperature range shall be -40°F to 140°F (-40°C to 60°C). External dimensions shall be 11.17" Diameter x 24.69" Depth (283.8mm x 627mm). The total enclosure shall weigh 23.55 lbs. (10.68 kg) per unit with grille. It shall have durable engineering and accurate sonic performance to deliver both good intelligibility and musicality with extended low frequency response. The loudspeaker shall be the Sonance Professional Series PS-P85T. No other system shall be acceptable unless the above combined performance specifications are equaled or exceeded.

## SAFETY AGENCY COMPLIANCE

Sonance Professional Series PS-P85T 8" Pendant Speaker meets the following standards:

**UL-1480A:** Speakers for Commercial and Professional use

**CSA-C22.2 No.205:** Signal equipment shall be installed in accordance with:

**NFPA-70:** National Electric Code

**NFPA-90A:** Installation of Air Conditioning and Ventilation

**CSA C22.1:** Canadian Electrical Code



## TECHNICAL ASSISTANCE AND SERVICE

For Technical Assistance, call (949) 492-7777 for any questions concerning the speaker operation and installation between the hours of 7:00AM - 5:00PM (Pacific), Monday through Friday, except holidays. In the event your unit should need repair or service, you may return the unit to your authorized dealer or use the following guidelines: **PLEASE KEEP ORIGINAL PACKAGING WHEN POSSIBLE.**

1. Be prepared to state the model number and/or serial number, date of purchase, dealer's name and address.
2. Contact Sonance directly at (949) 492-7777 or at [www.sonance.com](http://www.sonance.com). **YOU MUST HAVE PRIOR AUTHORIZATION TO RETURN YOUR UNIT.**
3. If you are returning the product directly to Sonance, call us to obtain a return authorization number before shipping.
4. Ship the product via United Parcel Service, Federal Express, or other package delivery service. Please do not use the U.S. Postal Service.
5. Include the return authorization number on the shipping label.
6. Ship to:

Attn: Quality Assurance Department, RMA# (include RMA number here)

Sonance

11016 Mulberry Ave., Suite B

Fontana, CA 92337

# WARRANTY, REMEDY, EXCLUSIONS AND LIMITATIONS (USA ONLY)

## LIMITED WARRANTY

Sonance warrants this product to the original purchaser to be free from defects in material and workmanship, under normal use and conditions, for a period of five (5) years from the date of original purchase as shown on the invoice. The foregoing exclusive warranty gives you specific legal rights, and you may have other rights, which vary from state to state. This warranty applies exclusively to the original purchaser.

The exclusive warranty does not apply and is ineffective if:

1. The invoice fails to establish that the product was purchased from an authorized Sonance dealer or distributor;
2. The product was subjected to misuse, neglect, accident, or improper installation.  
(Damage to the product was caused by accident, abuse or misuse);
3. The product was modified, altered, or repaired by unauthorized personnel; or
4. The unit was not used as described in the installation and operating instructions.

## EXCLUSIVE REMEDY

Sonance agrees, at its option during the five (5) year warranty period, to repair any defect in material or workmanship or to furnish an equal product in exchange without charge to the purchaser, subject to the verification of the defect and proof of the date of purchase.

## WARRANTY EXCLUSIONS AND DAMAGE LIMITATIONS

The exclusive warranty set forth above is in lieu of all other warranties, express or implied, including without limitation the implied warranties of merchantability and fitness for a particular purpose, which are expressly disclaimed. In no event, and under no circumstances or legal or equitable theory, shall Sonance be liable or responsible for any direct or indirect damages, consequential damages, loss, or injury, including without limitation, personal injury, bodily injury, property damage, emotional distress, death, real property or personal property damage, business interruption, costs of delay or lost profits arising from the product, whether based upon warranty, contract, negligence, strict product liability or other theory.